INSTALLATION INSTRUCTIONS

Bathroom Remodeling Instructions

JANUARY 1, 2026

MY HOME HARDWARE CO.
1234 Cree Cir NE, Hartville, OH 44632-9465

Table of Contents

1. Introduction 2
2. Floor Tile Installation 2
3. Wall Tile Installation 5
4. Bathroom Storage Remodeling 7
5. Lightning Fixture Installation 9
6. Plumbing Upgrade 10

My Home Hardware Co.
(+1) 995-497-5412

1. Introduction

About this Guide

This manual provides step-by-step guidance for tasks commonly undertaken in a bathroom remodeling project. Each section is designed to help you complete the project yourself, with clear instructions, required tools and materials, and illustrative guidance for every step.

The projects covered in this guide include:

- Floor Tile Installation
- Wall Tile Installation
- Bathroom Storage Remodeling
- Lightning Installation
- Plumbing Upgrade

Whether you are updating a single element or undertaking a full remodel, these instructions are intended to make the process straightforward and achievable. Follow the recommended sequence of steps to ensure safety, efficiency, and professional-quality results.

Before You Begin

A. Introduction

- Please read the instructions carefully to familiarize yourself with the required tools, materials, and installation sequence for each task.
- Follow the instructions in the sections that pertain to your remodeling task. This will help you avoid costly mistakes.
- In addition to these installation instructions, read all operating and safety instructions for the tools used in each task.

B. Installer Hazard Information

⚠ **CAUTION!!** Risk of personal injury.
Some tools are very heavy, and some materials need careful handling. For your protection, wear appropriate safety equipment when working with these products.

Prior to Installation

- Inspect all tools and materials to ensure no damage has occurred while in shipping.
- After inspection, leave all tools and materials in their original packaging, to prevent damage.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- All pre-installed parts must be checked and re-tightened before installation.

2. Floor Tile Installation

Introduction

This section provides comprehensive step-by-step instructions for installing floor tiles as a part of your Bathroom Remodeling project. The guide covers three popular tile types:

1. Ceramic Tiles
2. Porcelain Tiles
3. Vinyl Tiles

Each tile type requires specific techniques and considerations for proper installation. To achieve the best results, follow the instructions that correspond to the tile material you have selected.

Tools and Materials Required

- Replacement tiles (matching size and style)
- Tile adhesive or thin-set mortar
- Grout (matching color)
- Grout float
- Tile spacers
- Hammer and chisel (or oscillating tool)
- Notched trowel
- Sponge and bucket
- Safety gear (gloves, goggles)
- Tape Measure

1. Ceramic Tiles Installation Steps

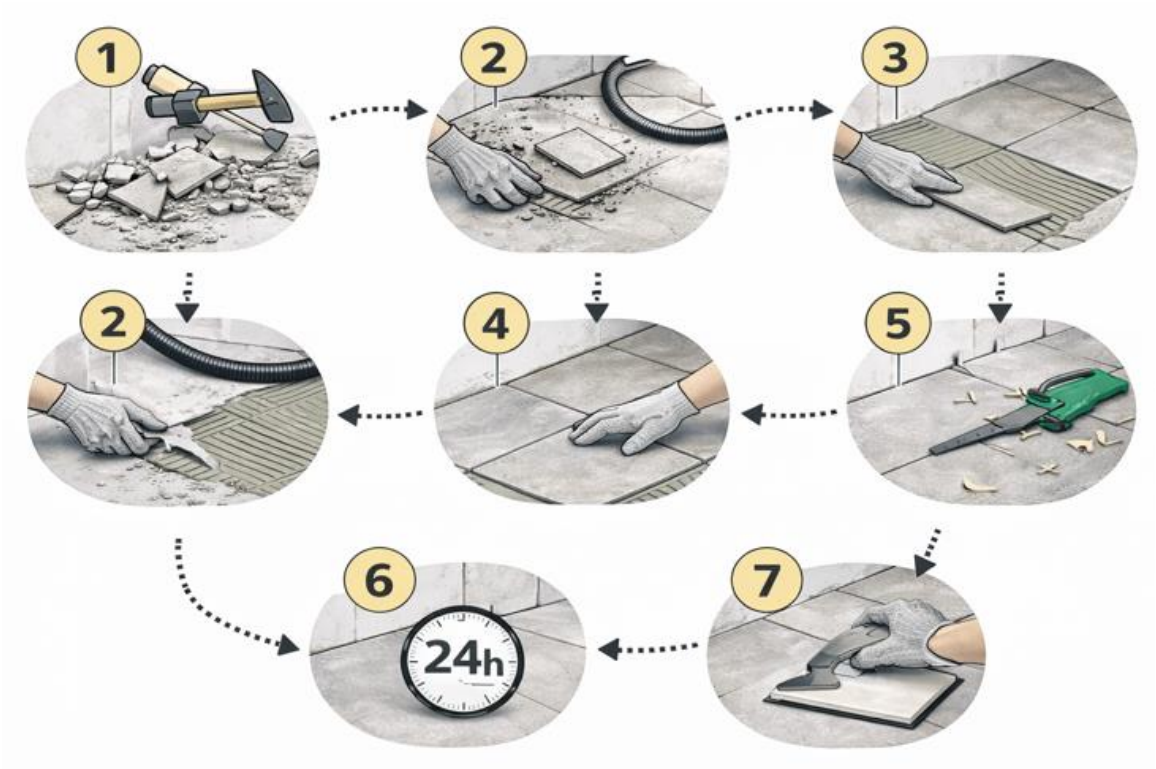

A. Step-by-Step Guide for Ceramic Tiles ：

- Step 1: Remove damaged tiles using a chisel.
- Step 2: Clean old adhesive and debris.
- Step 3: Apply fresh tile adhesive evenly.

- Step 4: Place ceramic tile firmly.
- Step 5: Insert spacers for alignment.
- Step 6: Allow curing for 24 hours.
- Step 7: Apply grout and clean excess.

B. Common Issues & Fixes for Ceramic Tiles ：

- If tiles are not level, check adhesive thickness before setting the tile.
- If grout cracks after drying, it may indicate insufficient curing time.

2. Porcelain Tiles Installation Steps

A. Common Issues & Fixes for Porcelain Tiles :

- Tiles feel uneven after installation:
  - Ensure the subfloor is properly leveled using a self-leveling compound before applying adhesive.
- Tiles loosen over time:
  - Use a modified thin set adhesive suitable for porcelain tiles and apply a thicker adhesive bed.
- Cracked grout lines:
  - Allow a longer curing time (24-48 hours) before grouting and avoid foot traffic during curing.

3. Vinyl Tiles Installation Steps

My Home Hardware Co.
(+1) 995-497-5412

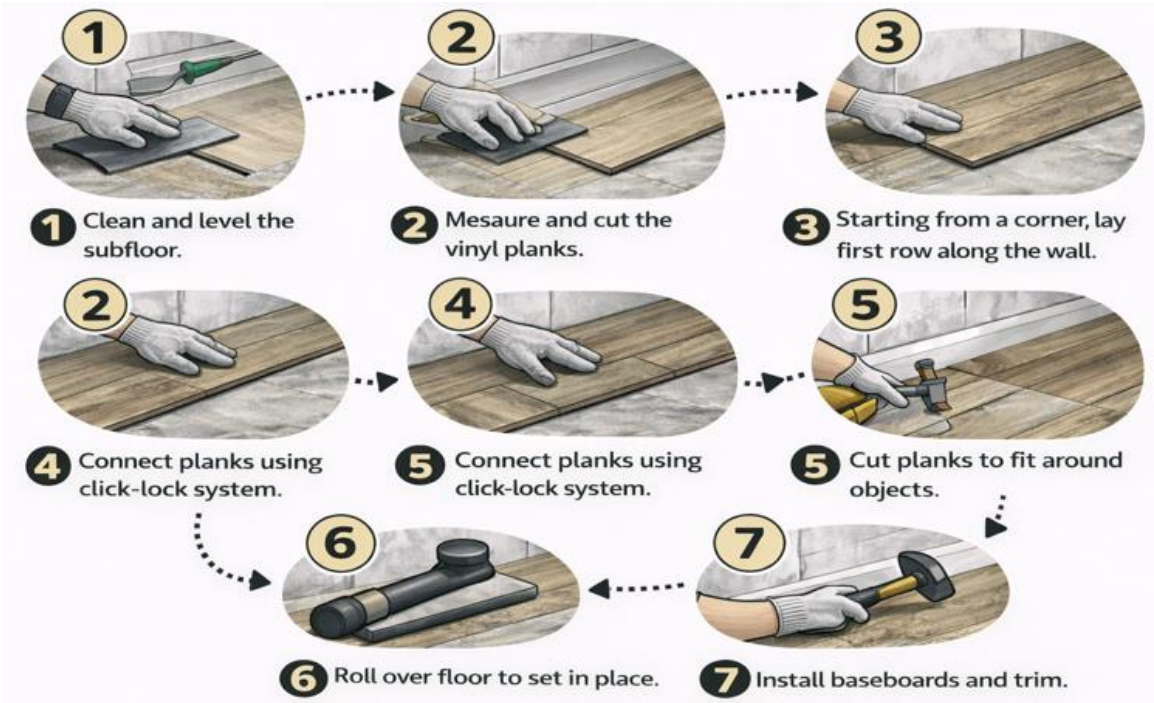

A. Common Issues & Fixes for Vinyl Tiles:

- Planks separating overtime:
  - Ensure the subfloor is clean, flat, and dry before installation, and confirm click-lock joints are fully engaged.
- Floor feels uneven or soft:
  - Check for debris or imperfections in the subfloor and correct them before installing vinyl planks.
- Edges lifting near walls:
  - Maintain proper expansion gaps around the perimeter and avoid excessive adhesive near edges.

Clean-up After Installation

When cleaning up after installation, do not use abrasive cleansers as they may scratch and dull the surface. Use warm water and liquid, non-abrasive detergent to clean the surface.

Stubborn stains, paint, or tar can be removed with turpentine or paint thinner. Do not allow cleaners containing petroleum distillates to remain in contact with the tile surface for long periods of time. Plaster can be removed by scraping with wood edge. Do not use metal scrapers, wire brushes, or other metal tools. One of the powder type detergents may be used on a damp cloth to provide mild abrasive action to the residual plaster.

3. Wall Tile Installation

Introduction

This section provides detailed step-by-step instructions for installing wall tiles as part of your bathroom remodeling project. Unlike floor tiles, wall tile installation follows a consistent process regardless of the tile type or material.

By following these instructions, you can achieve a secure, professional-quality finish that enhances both the durability and aesthetics of your bathroom. The process is designed for DIY enthusiasts, ensuring clarity, safety, and efficiency at every stage.

Tools and Materials Required

- Wall tiles
- Tile Cutter or Wet Saw
- Tile adhesive or thin-set mortar
- Grout
- Grout Float
- Primer or Waterproof Membrane
- Tile Spacers
- Notched Trowel
- Sealant
- Hammer and chisel (or oscillating tool)
- Notched trowel
- Sponge
- Safety gear (gloves, safety glasses, and dust mask)
- Tape Measure

Installation Steps

A. Step-by-Step Guide

- Step 1: Remove Existing Wall Covering: Carefully remove old wall tiles or panels using a chisel and hammer. Start from a loose edge to avoid damaging the wall structure behind.
- Step 2: Inspect and Repair the Wall Surface: Check the wall substrate (cement board or drywall) for moisture damage, cracks, or mold. Replace damaged sections before proceeding.
- Step 3: Apply Waterproofing Layer: Apply a waterproof membrane or waterproofing compound to the wall surface, especially in shower and bathtub areas. Allow it to dry fully before tile installation.
- Step 4: Apply Tile Adhesive or Panel Adhesive: Use a notched trowel to spread tile adhesive evenly on the wall. For wall panels, apply manufacturer-recommended adhesive.
- Step 5: Install Wall Tiles or Panels: Press tiles firmly into place, working from the bottom upward. Use spacers to maintain even gaps. For panels, align edges carefully and secure firmly.
- Step 6: Allow Adhesive to Cure: Let the adhesive cure according to manufacturer guidelines, typically 24 hours. Avoid contact or moisture during this period.
- Step 7: Apply Grout and Seal: Apply grout between tiles using a rubber float. Wipe off excess grout and allow it to cure. Apply a sealant to grout lines if required.

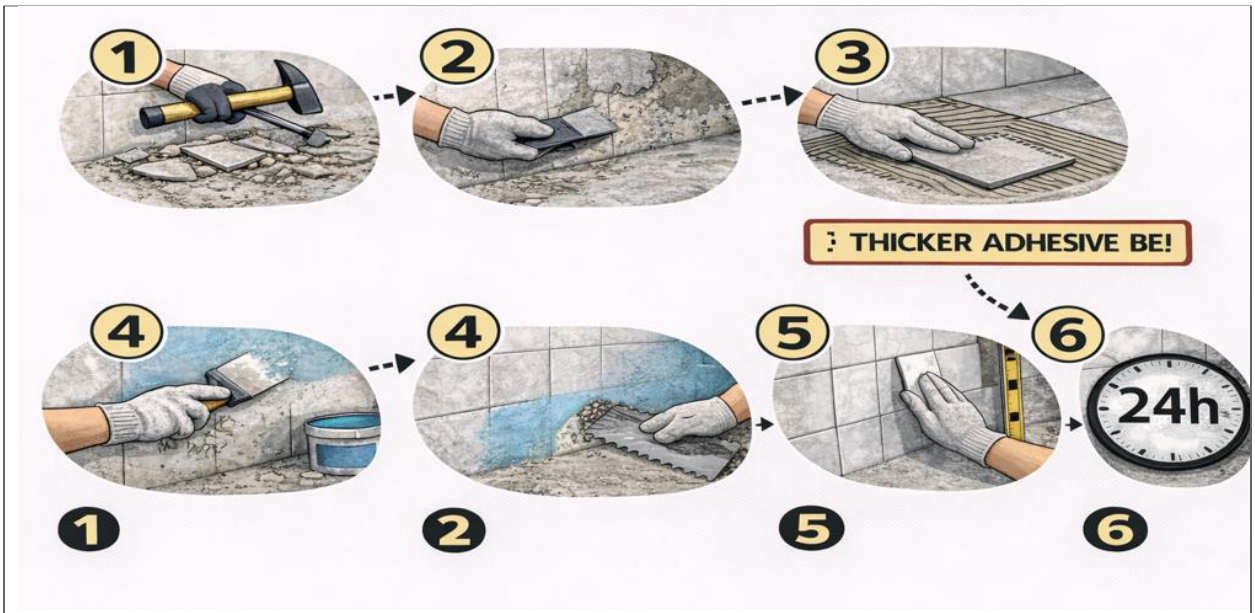

B. Common Issues & Fixes

- Tiles sliding down the wall:
  - Start installation from a level support strip or ledger board at the bottom.
- Water seeping behind tiles:
  - Ensure a proper waterproof membrane is applied before tiling.
- Cracked or crumbling grout:
  - Allow sufficient curing time and avoid over-watering during grout application.
- Uneven tile alignment:
  - Use spacers consistently and check alignment with a level after each row.

Clean-up After Installation

When cleaning up after installation, do not use abrasive cleansers as they may scratch and dull the surface. Use warm water and liquid, non-abrasive detergent to clean the surface.

Stubborn stains, paint, or tar can be removed with turpentine or paint thinner. Do not allow cleaners containing petroleum distillates to remain in contact with the tile surface for long periods of time. Plaster can be removed by scraping with wood edge. Do not use metal scrapers, wire brushes, or other metal tools. One of the powder type detergents may be used on a damp cloth to provide mild abrasive action to the residual plaster.

4. Bathroom Storage Remodeling

Introduction

This section provides step-by-step instructions for installing bathroom cabinets and storage units as part of your remodeling project. Properly installed cabinets not only enhance the aesthetics of your bathroom but also maximize storage space and improve accessibility for daily-use items.

This guide covers Wall Cabinet as a storage solution. The installation process emphasizes:

- Accurate Wall Anchoring for safety and stability
- Level Alignment for a professional finish
- Moisture-Resistant Materials for long-term durability

By following these instructions, you can create organized, functional storage that protects your essentials from moisture while complementing your bathroom design.

Tools and Materials Required

- Cabinets or Shelving Units
- Mounting Brackets or Hardware
- Wall Anchors and Screws
- Moisture-Resistant Backing or Sealant
- Tap Measure
- Level
- Drill and Drill Bits
- Screwdriver
- Pencil and Marking Tools
- Safety Gear

Installation Steps

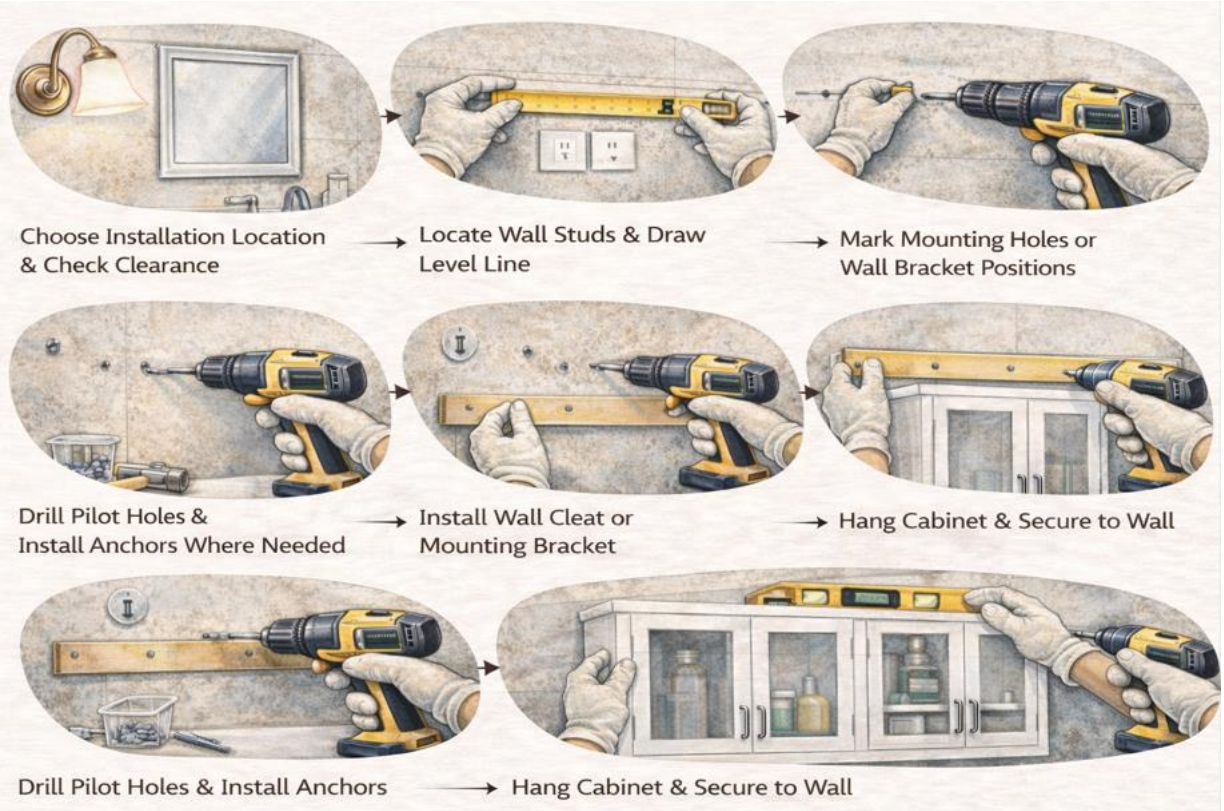

My Home Hardware Co.
(+1) 995-497-5412

Common Issues & Fixes for Bathroom Storage:

- Cabinet feels loose or unstable:
  - Use stronger anchors or mount directly into wall studs.
- Cabinet not level:
  - Loosen screws slightly, realign with a level, and retighten.
- Wall damage during installation:
  - Use appropriate drill bits and avoid excessive force.
- Moisture damage over time:
  - Ensure the cabinet material is moisture-resistant and install adequate bathroom ventilation.

Handling the Logistics of a Large Storage Cabinet:

To transport a large storage cabinet, here are some options you can consider:

1. **Free Delivery:** Many retailers offer free delivery for large items. This is a cost-effective and convenient option.
2. **Same-Day Delivery:** If you order by 4 p.m., some in-stock items may qualify for same-day delivery. Availability depends on the product and your location.
3. **Next-Day Delivery:** For a broader range of products, next-day delivery is available, ensuring you get your cabinet the following business day.

5. Lightning Fixture Installation

Introduction

Lighting is a critical element in any bathroom remodel, influencing functionality, safety, and overall aesthetics. This guide provides step-by-step instructions for installing common bathroom lighting fixtures.

Modern LED lighting offers energy efficiency, long lifespan, and a range of color temperatures to suit your design preferences. Proper fixture placement, adherence to electrical safety standards, and the use of moisture-rated components are essential to ensure reliable performance and user safety.

By following this guide, you can achieve a well-lit, stylish bathroom that combines practicality with modern design.

Tools and Materials Required

- Lighting Fixtures
- Electrical Box or Mounting Bracket
- Voltage Tester
- Tape Measure
- Wire Strippers

- Screwdriver
- Drill and Drill Bits
- Wire Connectors (Wire Nuts)
- Electrical Tape
- Bulbs
- Sealant
- Pliers
- Level
- Safety Gear

Installation Steps

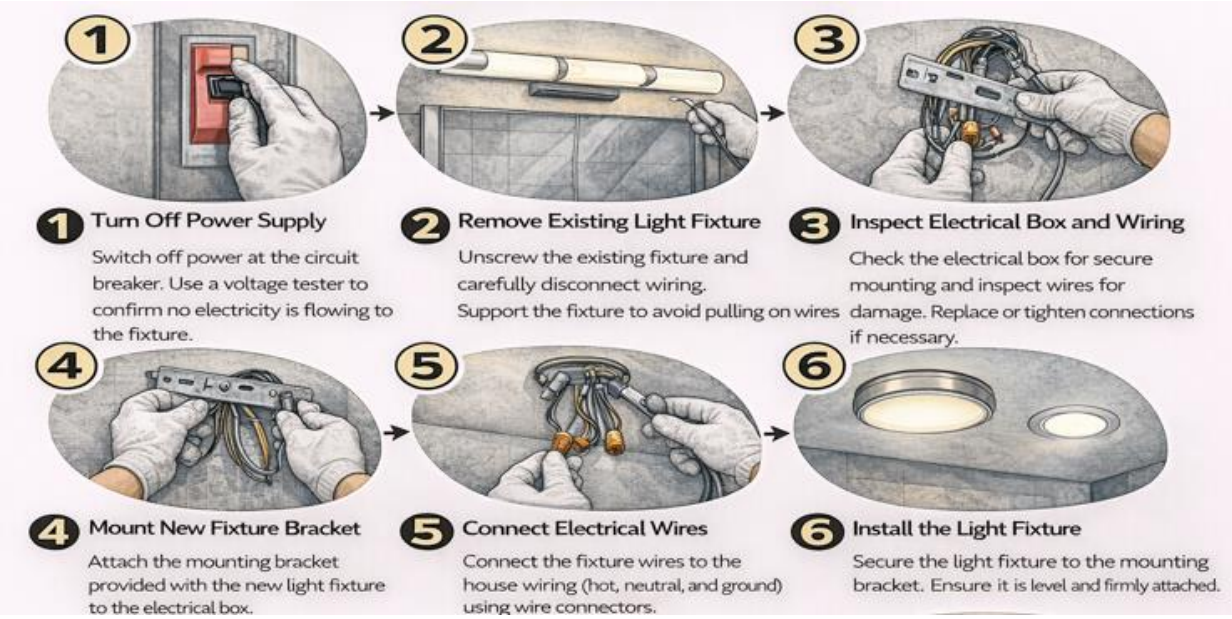

A. Common Issues & Fixes for Lightning Fixture:

- Light does not turn on:
  - Check wiring connections and ensure the circuit breaker is switched on.
- Flickering LED light:
  - Confirm compatibility with the existing dimmer switch or replace with an LED-rated dimmer.
- Fixture feels loose:
  - Tighten mounting screws and ensure the electrical box is properly secured.
- Moisture damage near shower:
  - Use fixtures rated for wet or damp locations only.

6. Plumbing Upgrade

Introduction

Plumbing upgrades are an essential part of bathroom remodeling, ensuring efficient water delivery and proper wastewater removal. This guide provides step-by-step instructions for installing a Shower Head.

Correct installation is critical to prevent leaks, clogs, and water damage. Most plumbing upgrades are DIY friendly when existing pipe connections are compatible and proper sealing techniques are applied.

By following this guide, you can enhance the functionality and reliability of your bathroom plumbing system while maintaining safety and durability.

Tools and Materials Required

- Shower Head
- Shower Hose
- Mounting Bracket or Holder
- Rubber Washers
- Sealant
- Adjustable Wrench
- Plumber's Tape
- Pliers
- Safety Gear

Installation Steps

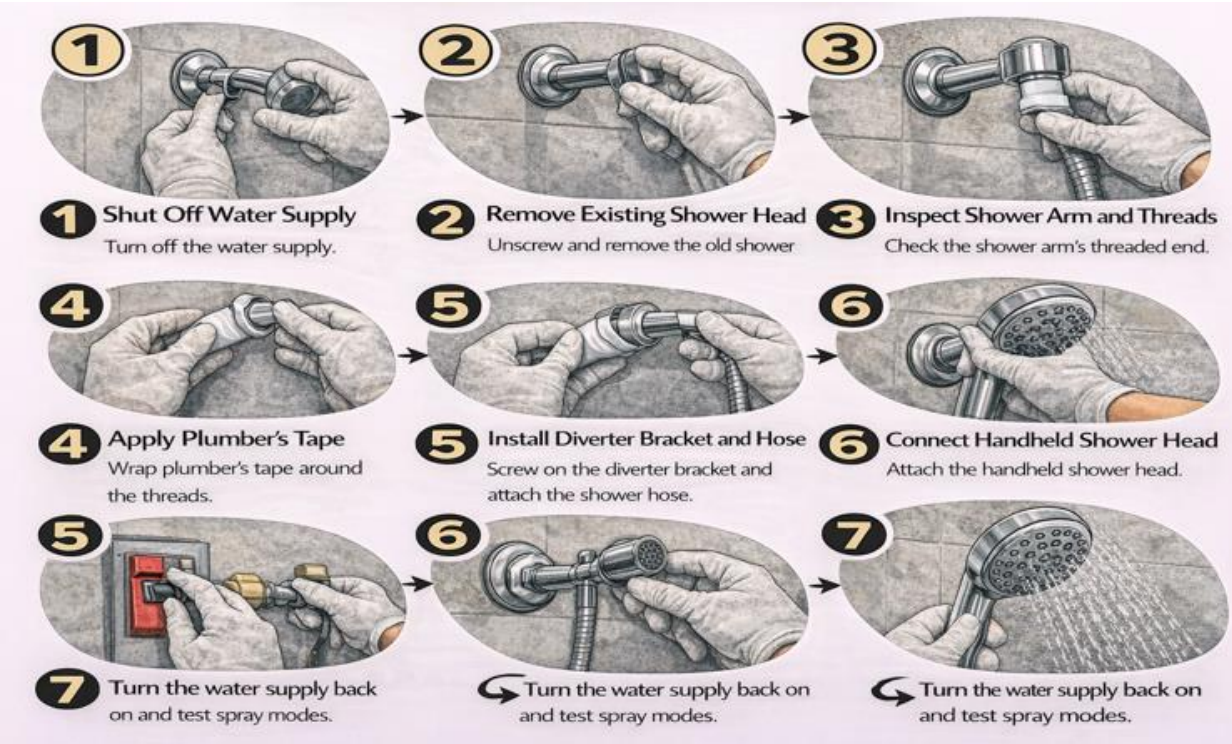

A. Common Issues & Fixes for Plumbing Upgrade:

- Bathtub not level:
  - Recheck the subfloor and use shims to level the tub before securing it permanently.
- Water leaking around drain:
  - Ensure drain fittings are properly tightened and sealed with plumber's putty or gasket as recommended.
- Cracking or movement when stepping into tub:

My Home Hardware Co.
(+1) 995-497-5412

    - Verify that the bathtub base is fully supported and that the floor framing is reinforced.
- Gaps between tub and wall:
    - Apply a high-quality waterproof silicone sealant to close gaps and prevent water seepage.

My Home Hardware Co.
(+1) 995-497-5412